



Ohmic contacts by phosphorous ion implantation on (111) N-type CVD Diamond

Josiane Tasselli, Lya Fontaine, Karine Isoird, Patrick Austin

► To cite this version:

Josiane Tasselli, Lya Fontaine, Karine Isoird, Patrick Austin. Ohmic contacts by phosphorous ion implantation on (111) N-type CVD Diamond. 31st International Conference on Diamond and Carbon Materials, Sep 2021, ONLINE, Spain. , 2021. hal-03445509

HAL Id: hal-03445509

<https://laas.hal.science/hal-03445509>

Submitted on 1 Aug 2024

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.


L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Introduction

- Development of ohmic contacts on (111) n-type CVD $2 \times 2 \text{ mm}^2$ diamond
- Study of different n-doping techniques by beam line and plasma immersion ion implantations
- Characterization of contact resistances by linear and circular-type TLM structures

Characteristics of studied samples


- **N₂ to N₄**: n⁺-doping by beam line and plasma-immersion ion implantations on $6 \times 10^{17} \text{ at.cm}^{-3}$ phosphorous-doped epitaxial layers
- **N₅**: 0.2 μm thick n⁺-layer grown on (111) diamond and heavily doped with $[P] = 1.6 \times 10^{20} \text{ at.cm}^{-3}$

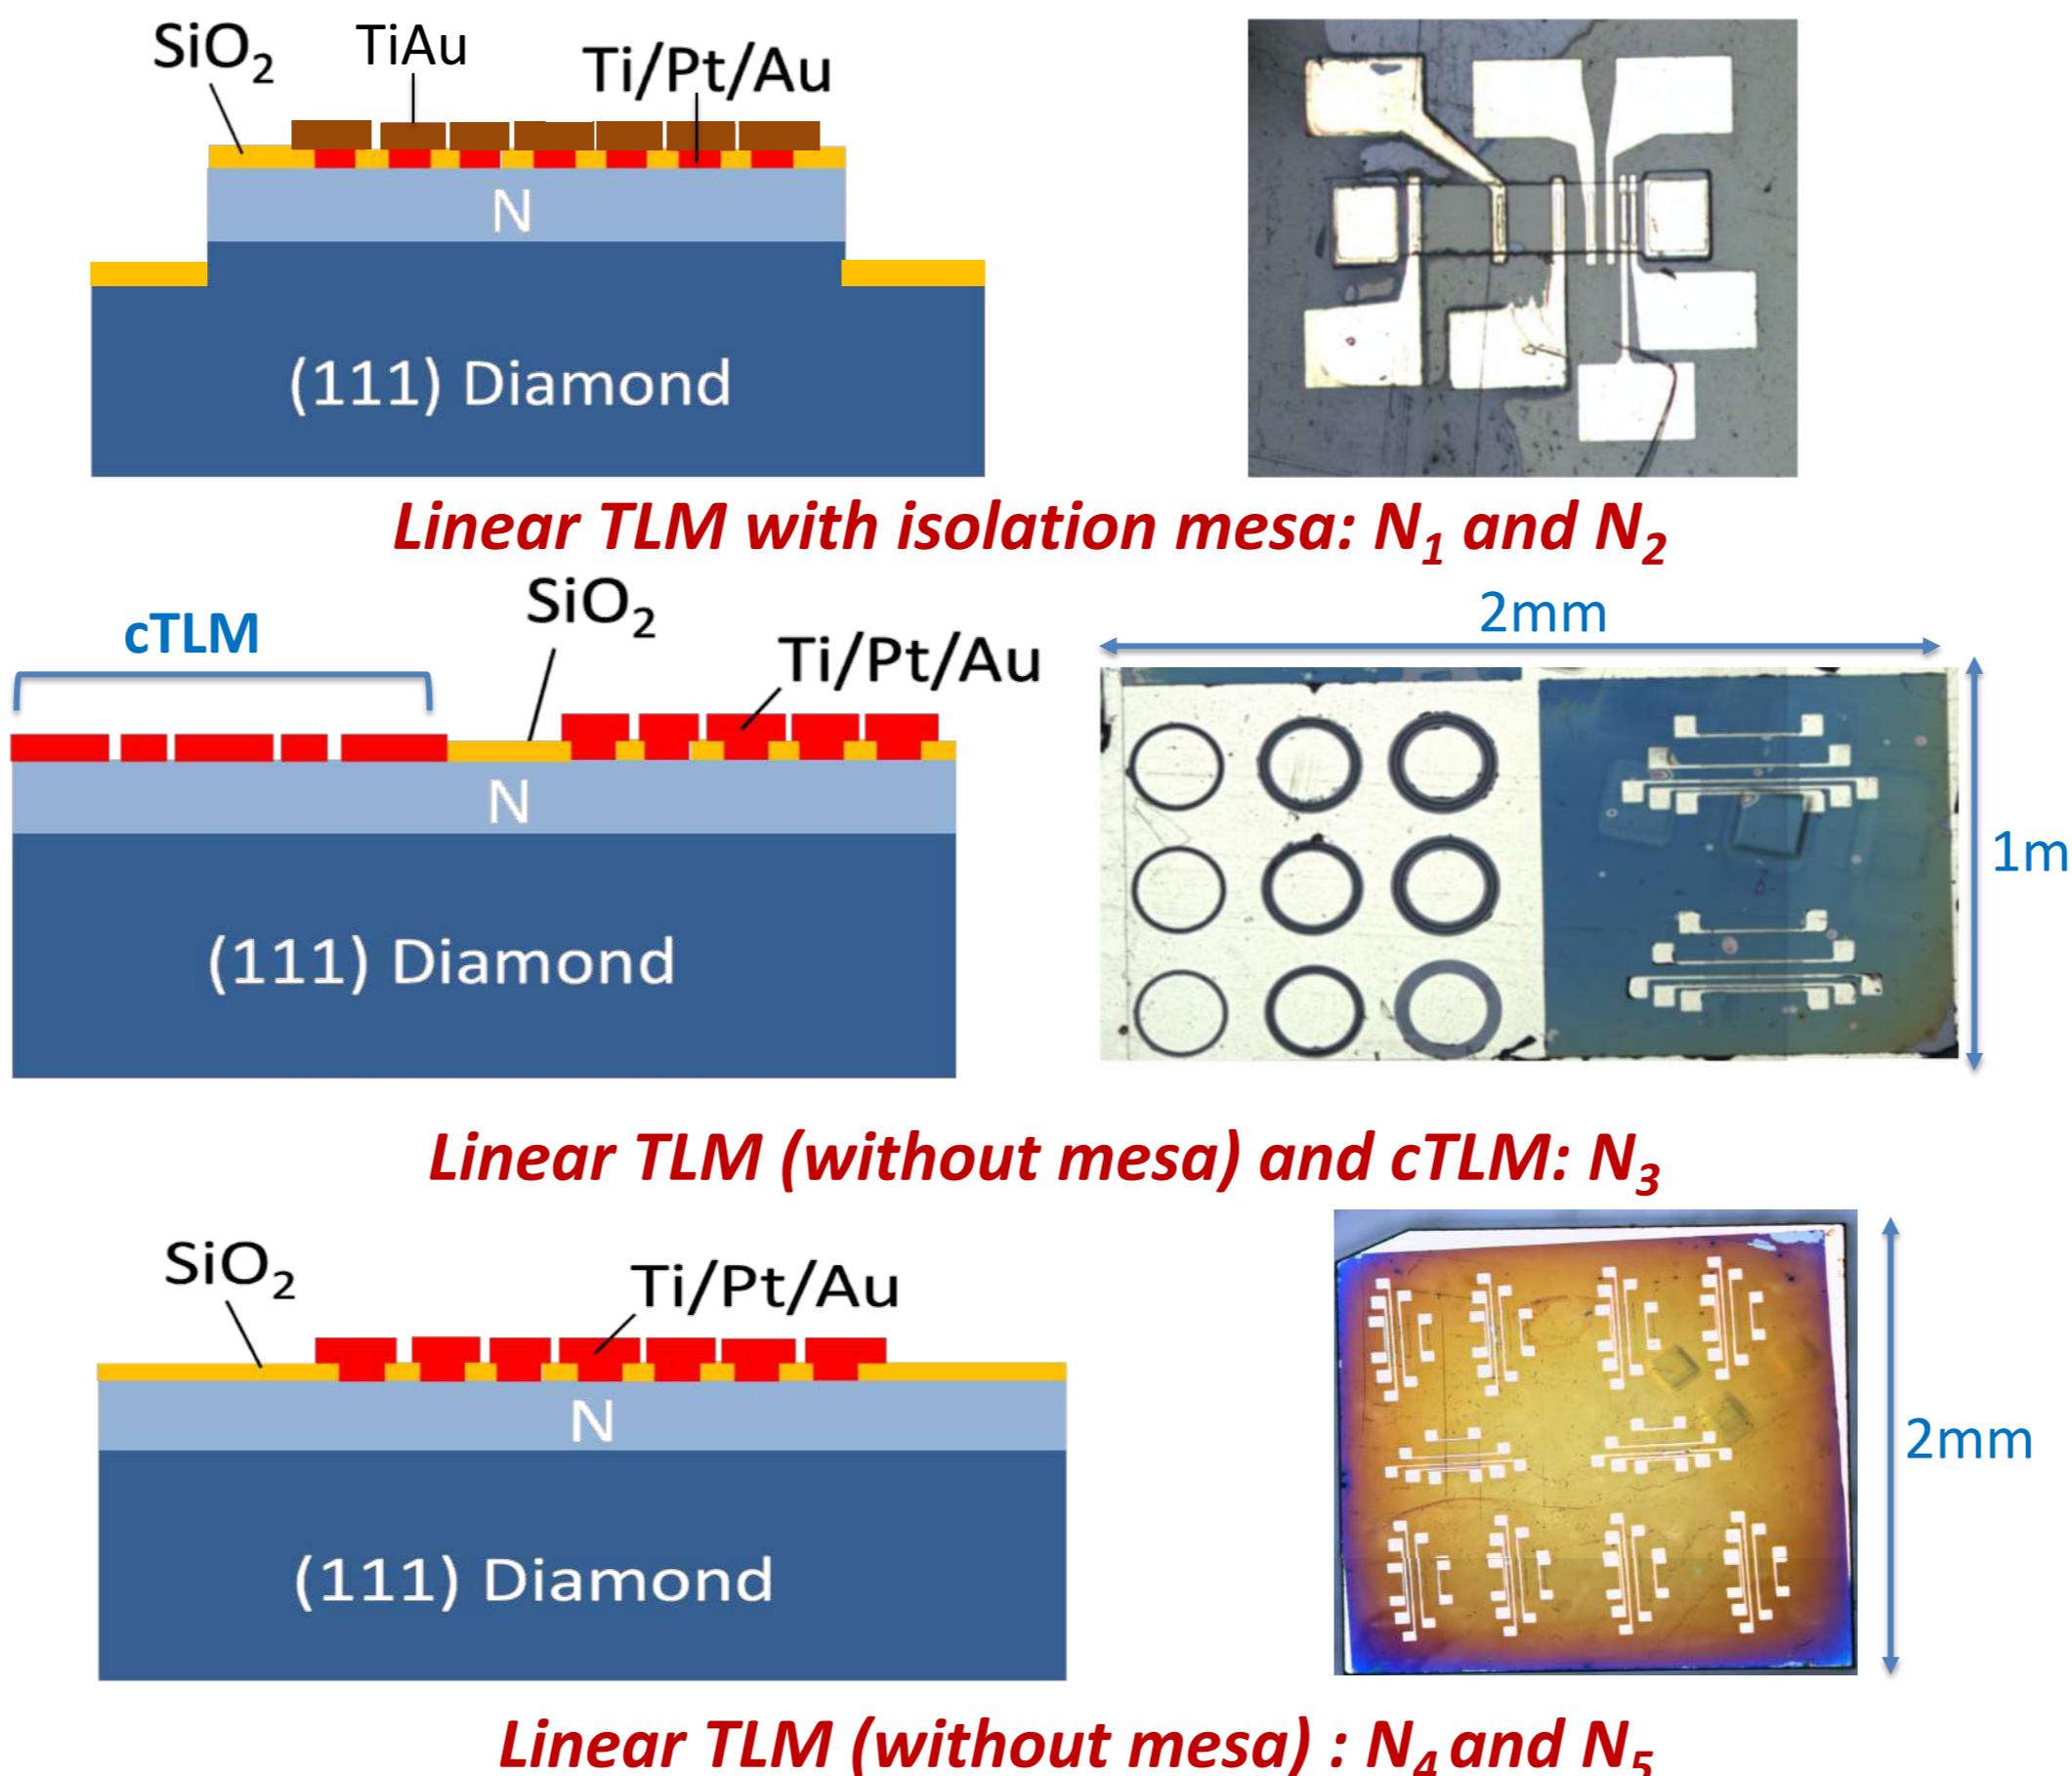


Fabrication and characterization of TLM structures

- Phosphorous overdoping by plasma-immersion implantation: **N₃ and N₄**

N₃ and N₄: total resistance as a function of spacing for linear TLM measured at ambient temperature

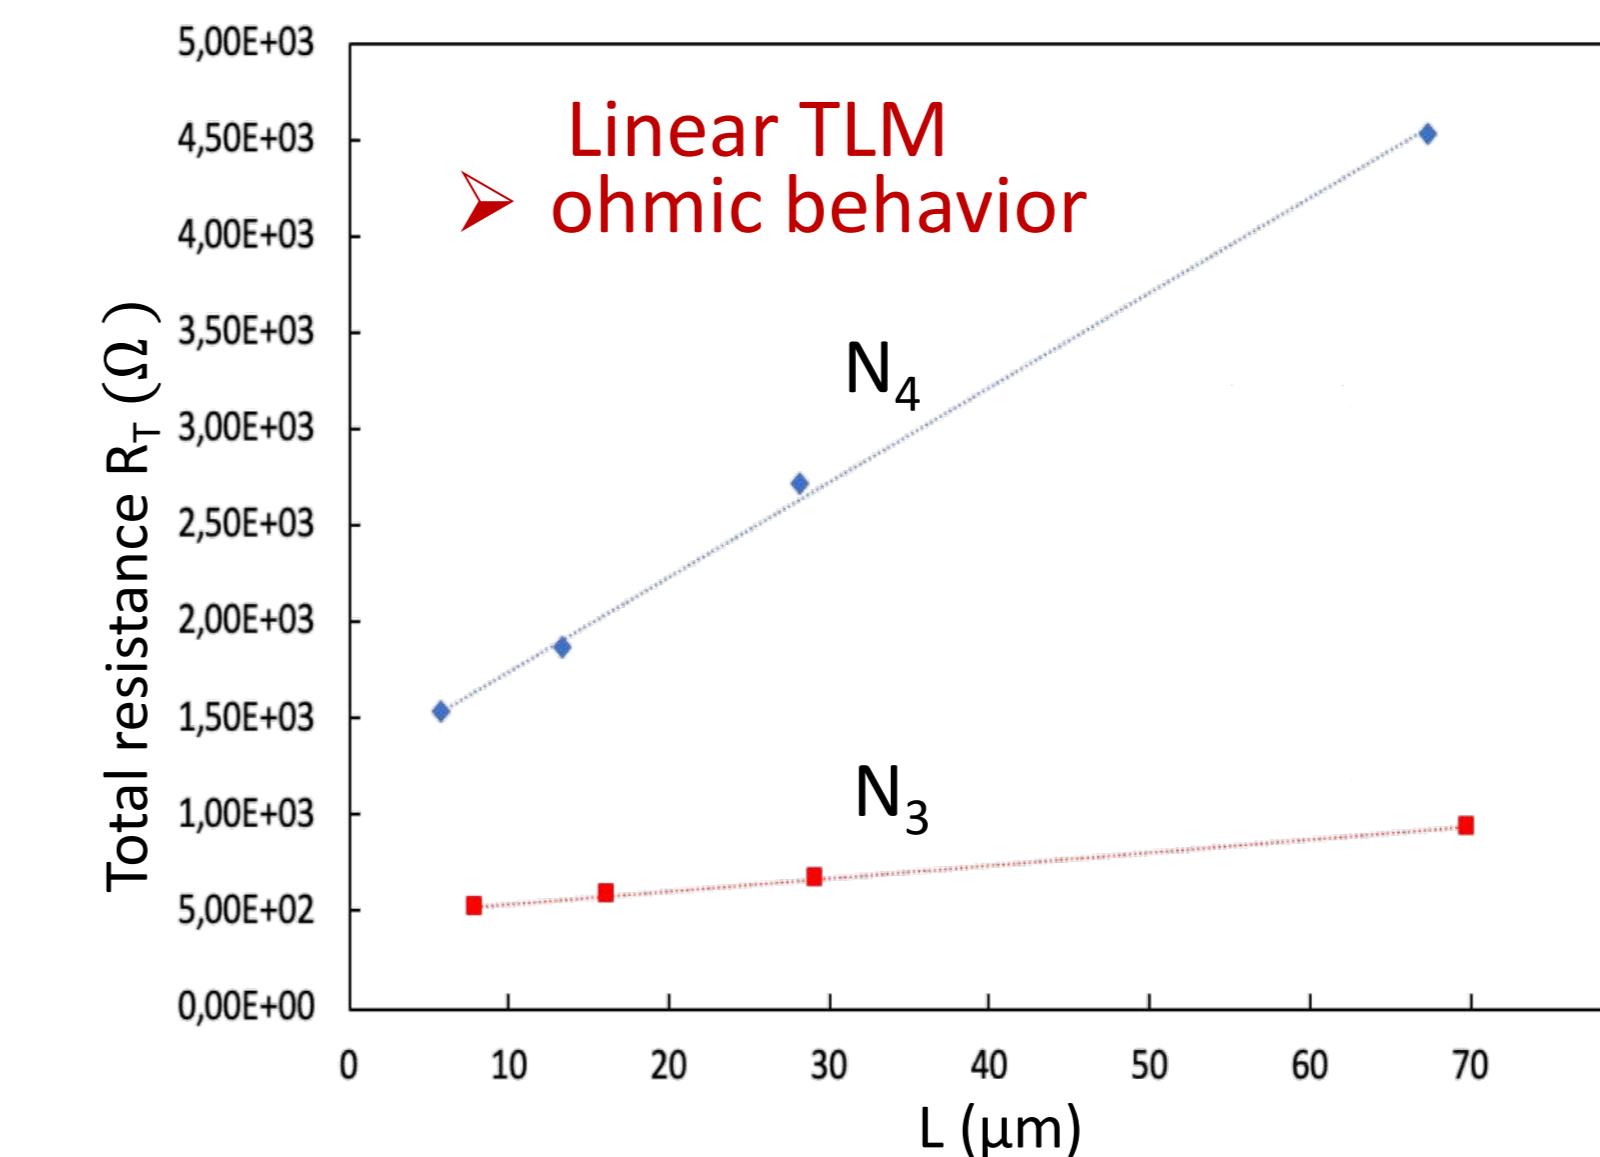


N₃: I(V) characteristics for linear TLM as a function of spacing measured at ambient temperature

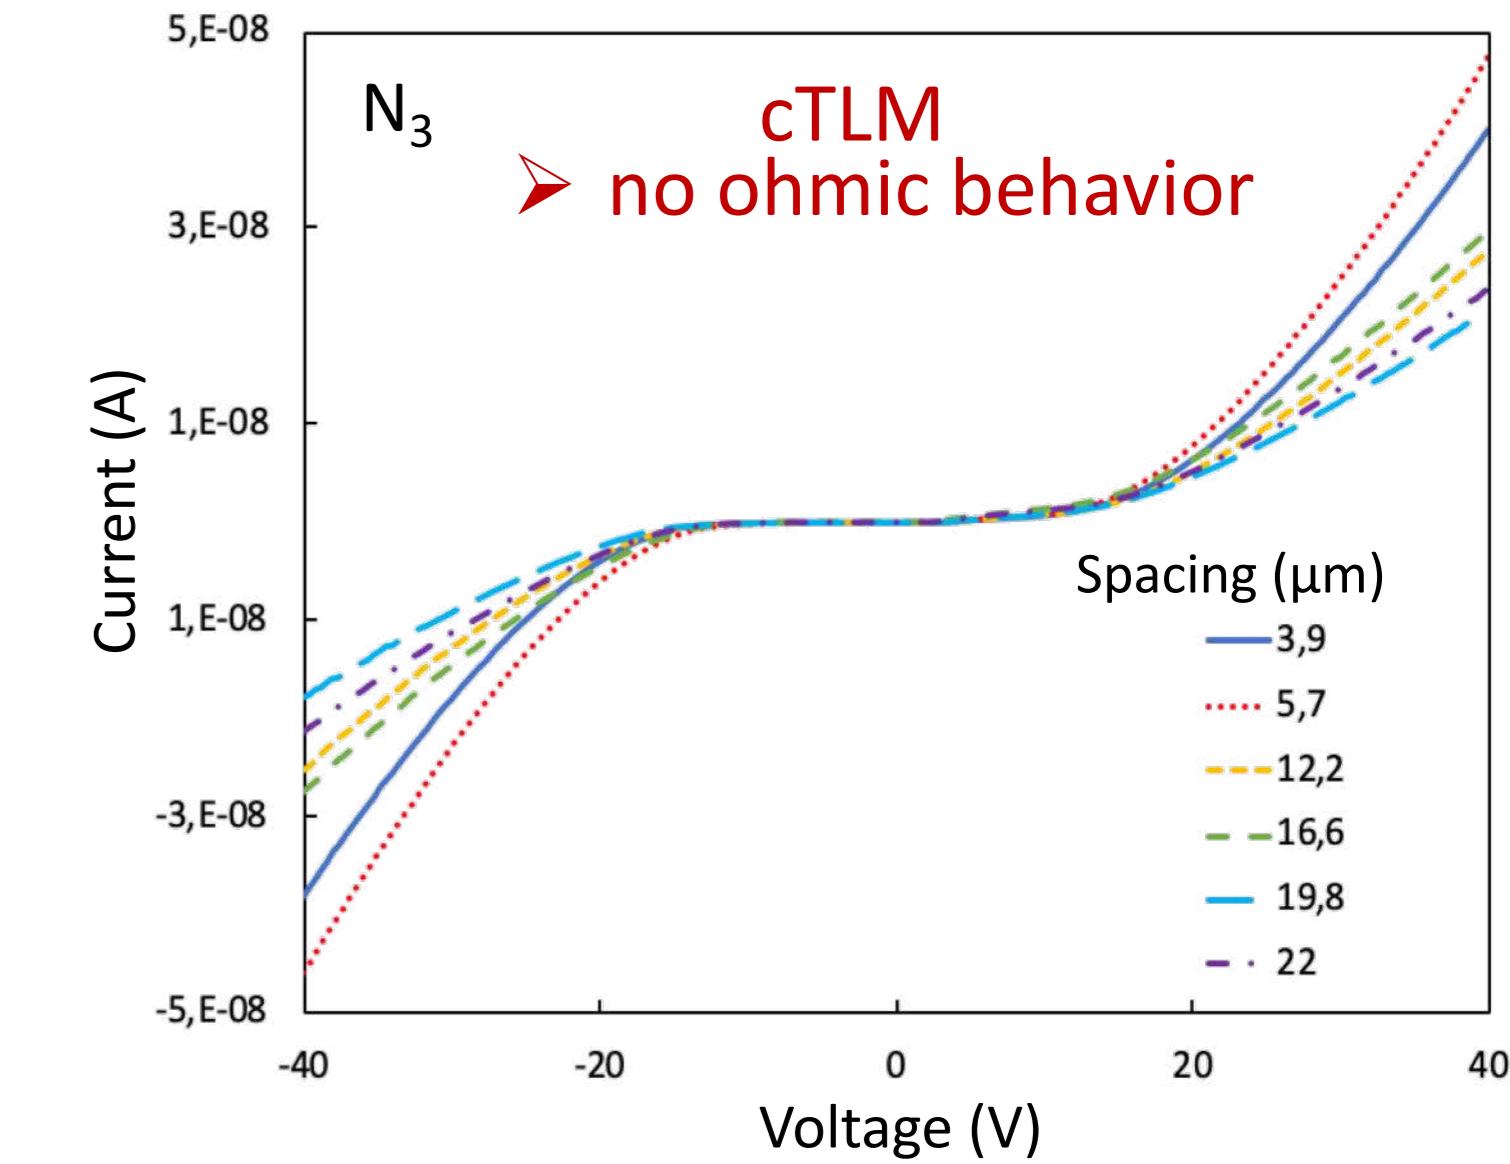

| Linear TLM | Sheet resistance | Specific contact resistance |
|----------------|-----------------------------|--|
| N ₃ | $R_{SH} = 1.5 \text{ kΩ/◻}$ | $\rho_C = 1.7 \times 10^{-3} \text{ Ω.cm}^2$ |
| N ₄ | $R_{SH} = 9.7 \text{ kΩ/◻}$ | $\rho_C = 6.7 \times 10^{-2} \text{ Ω.cm}^2$ |


- TEM characterizations performed on N₃

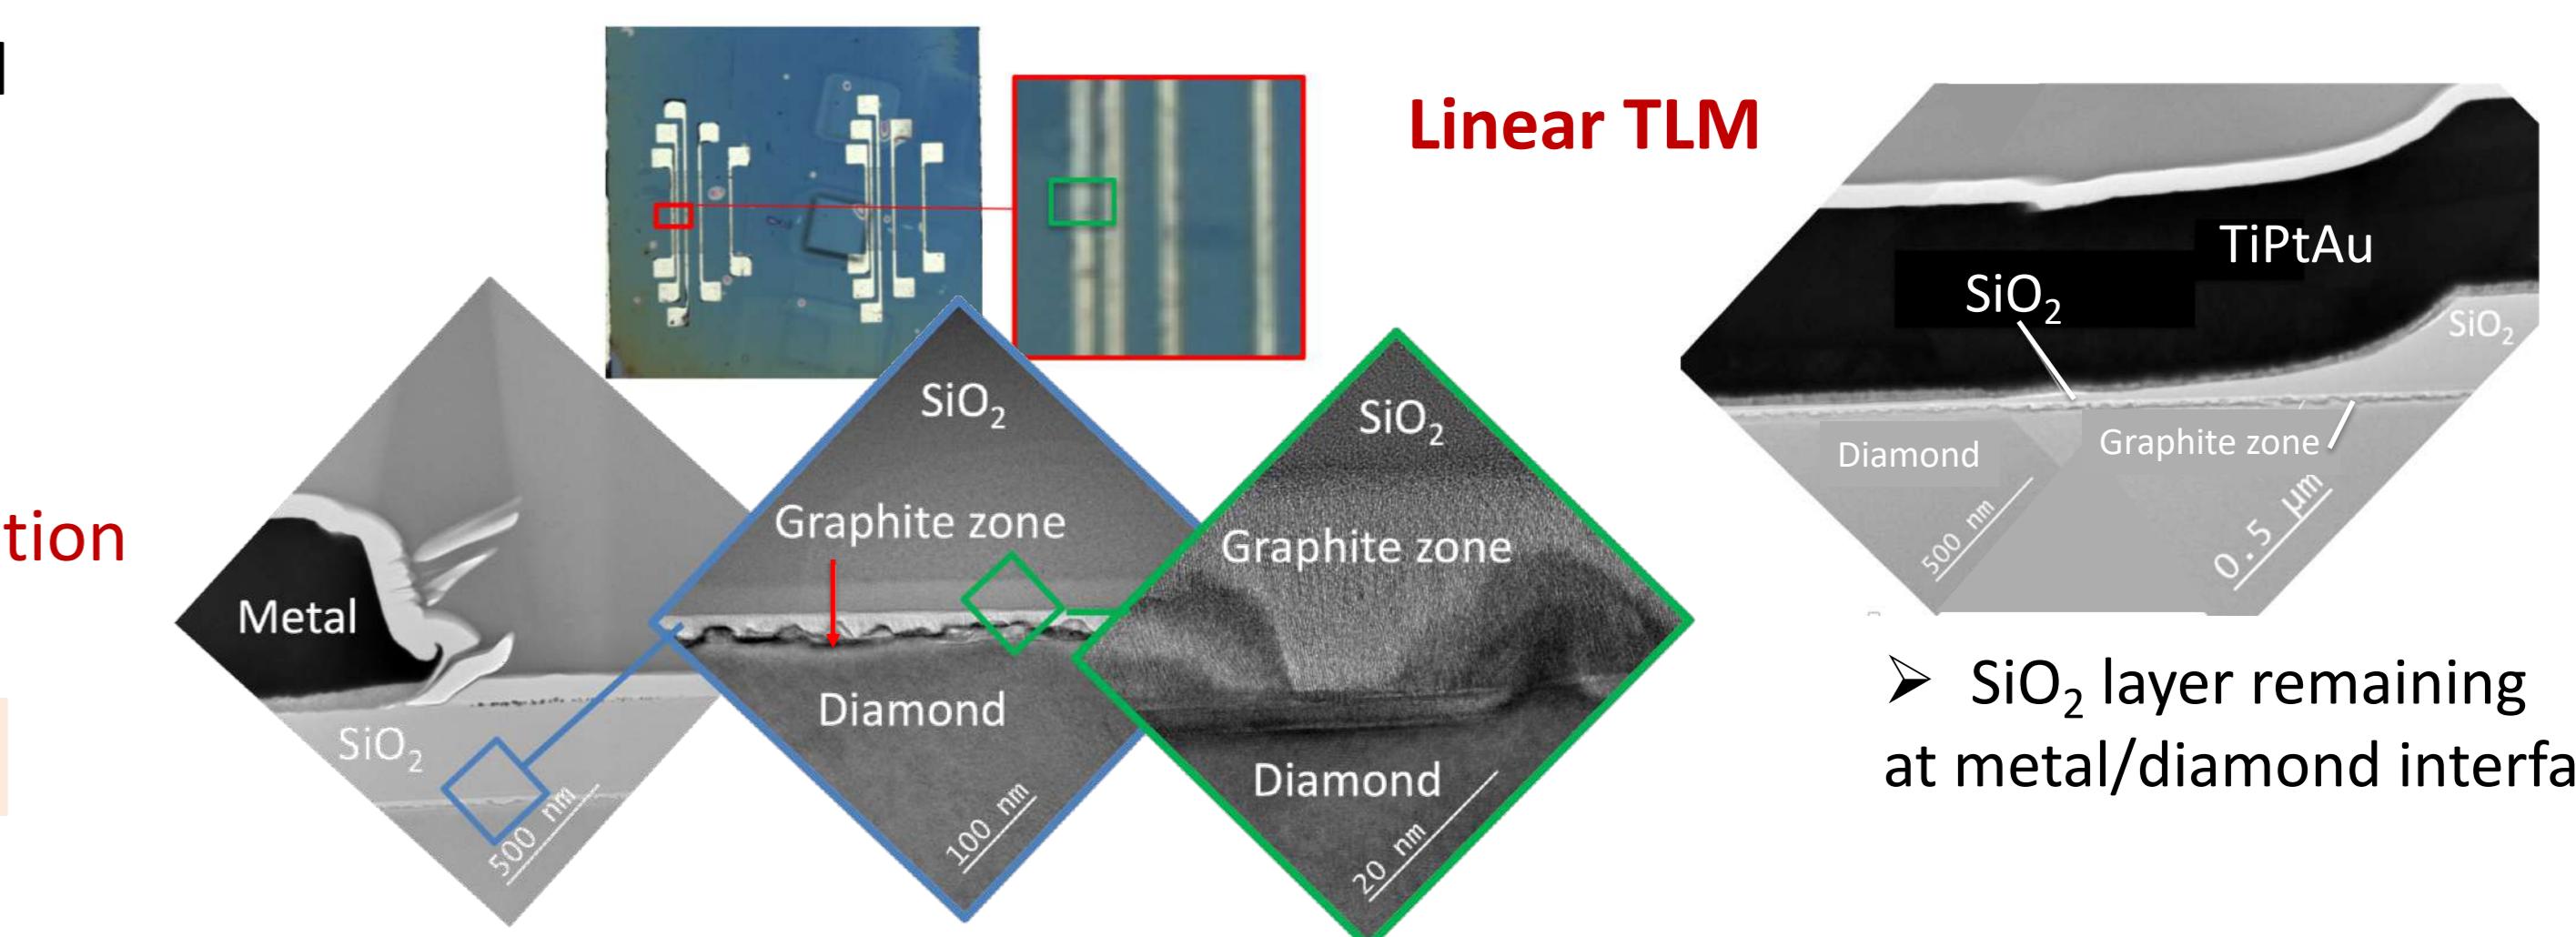

➤ SiO₂ layer remaining at metal/diamond interface

➤ Graphite layer (10-25 nm thick) at diamond surface probably at the origin of the electrical conduction observed

Circular TLM

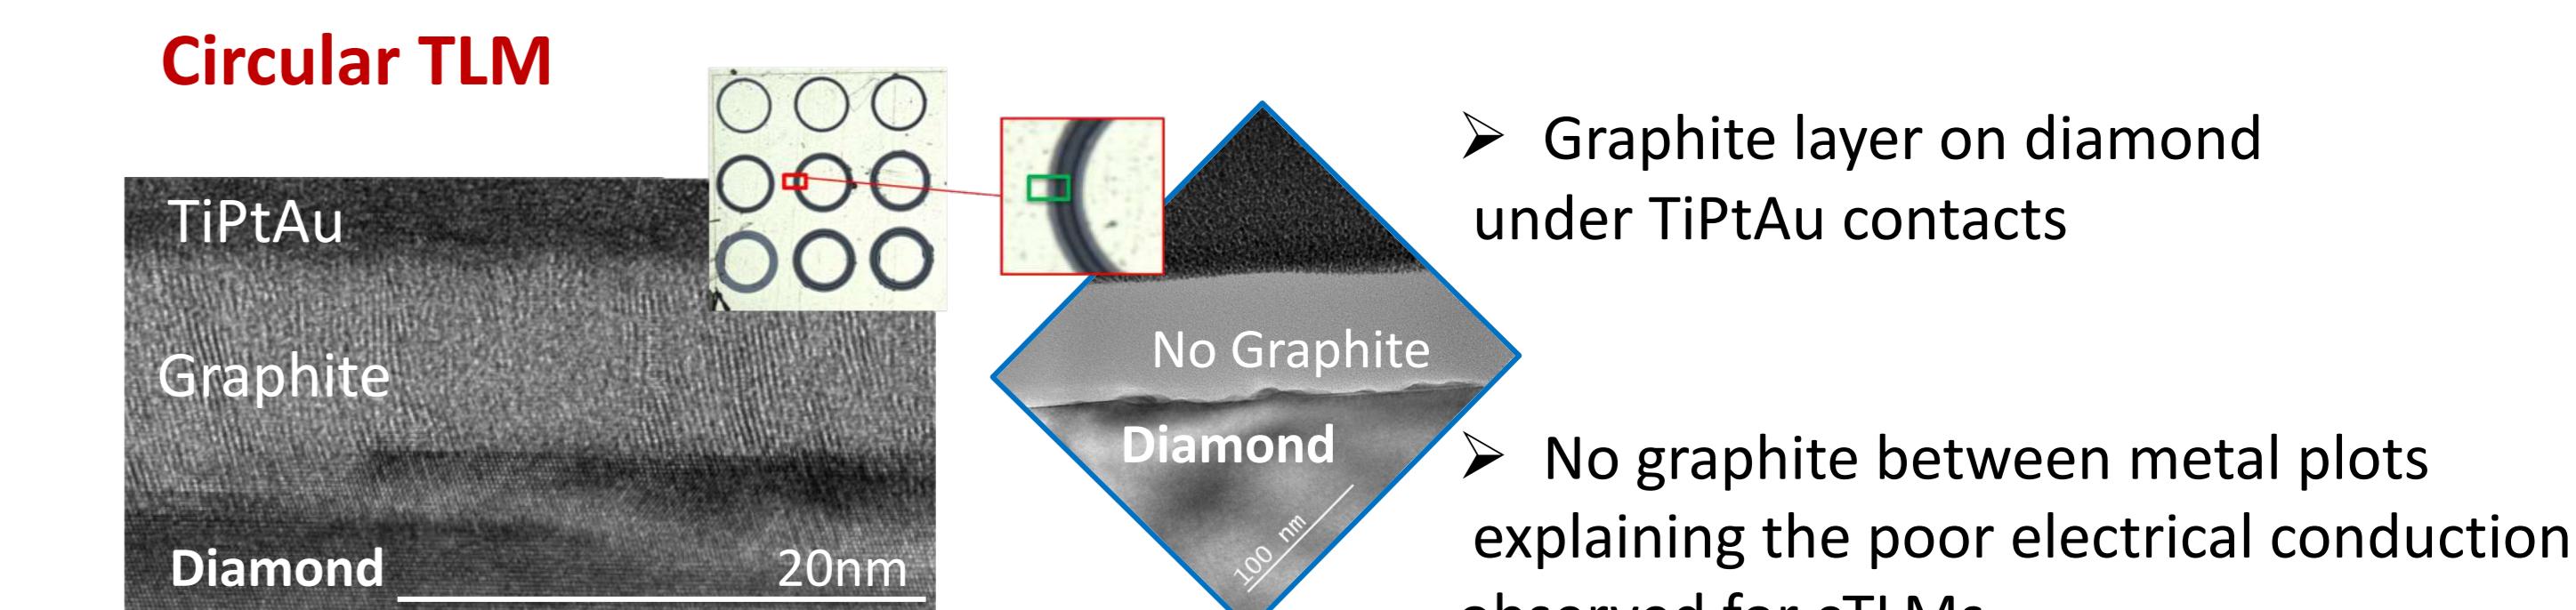


➤ Graphite layer on diamond under TiPtAu contacts

➤ No graphite between metal plots explaining the poor electrical conduction observed for cTLMs


Conclusion

- No ohmic contact obtained with highly phosphorous-doped epitaxial layer or by beam line implantation overdoping
- Ohmic behavior with plasma-immersion ion implantation with PH₃ plasma at 20keV and 10^{14} at/cm^3 with the formation of a conducting graphite layer
- Studies are on going to explain the graphite layer formation and for testing new PIII implantation conditions


➤ SIMS depth profiles of CVD n-layers

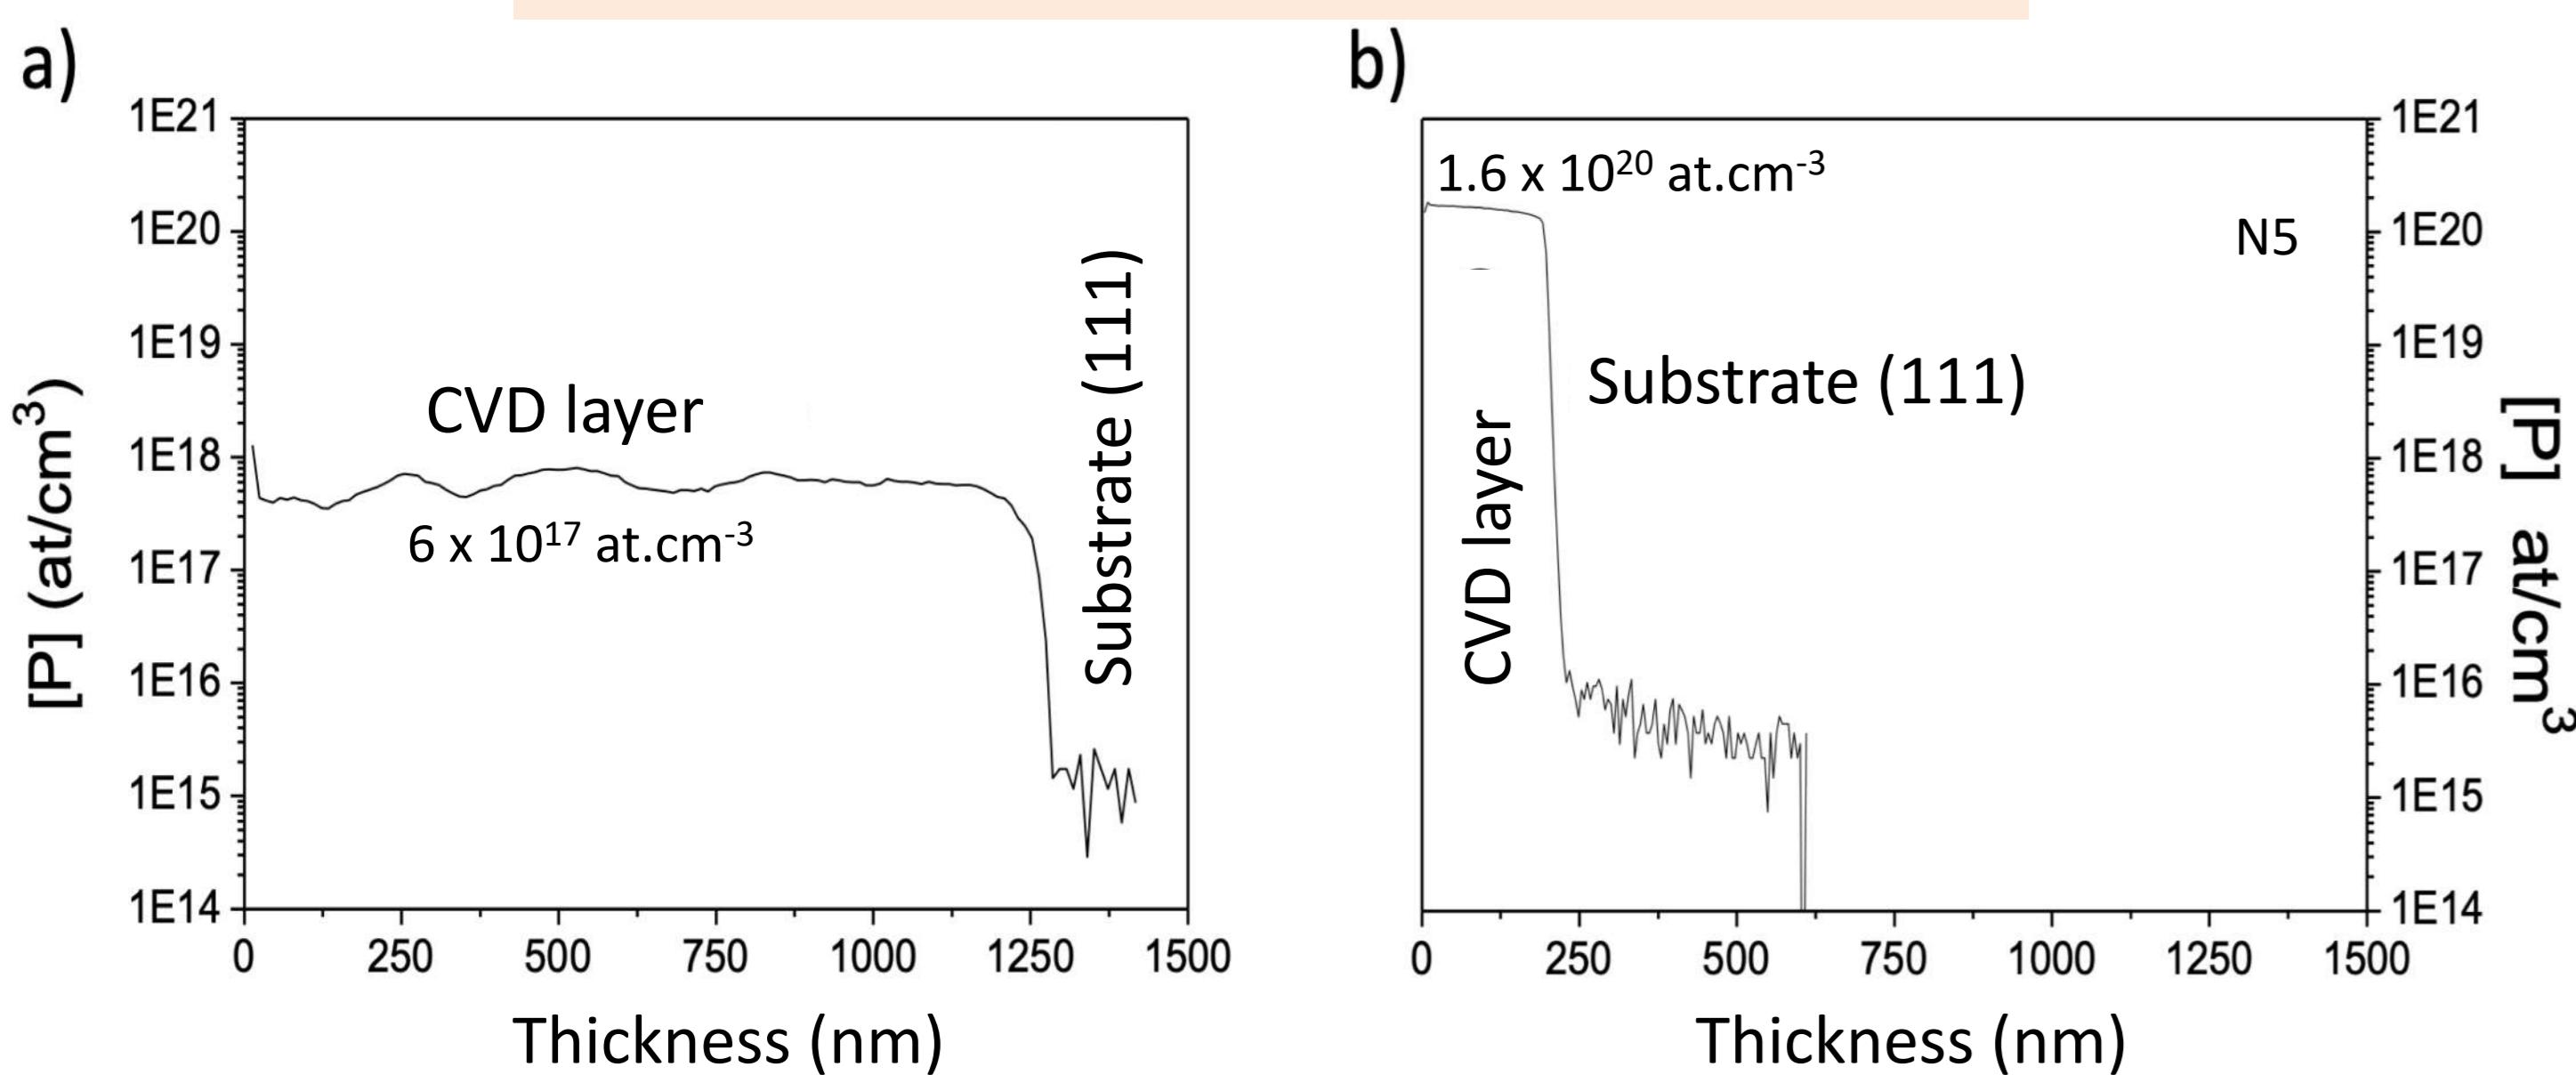

a) phosphorous-doped layer by CVD before ion implantation (N₁-N₄ samples)

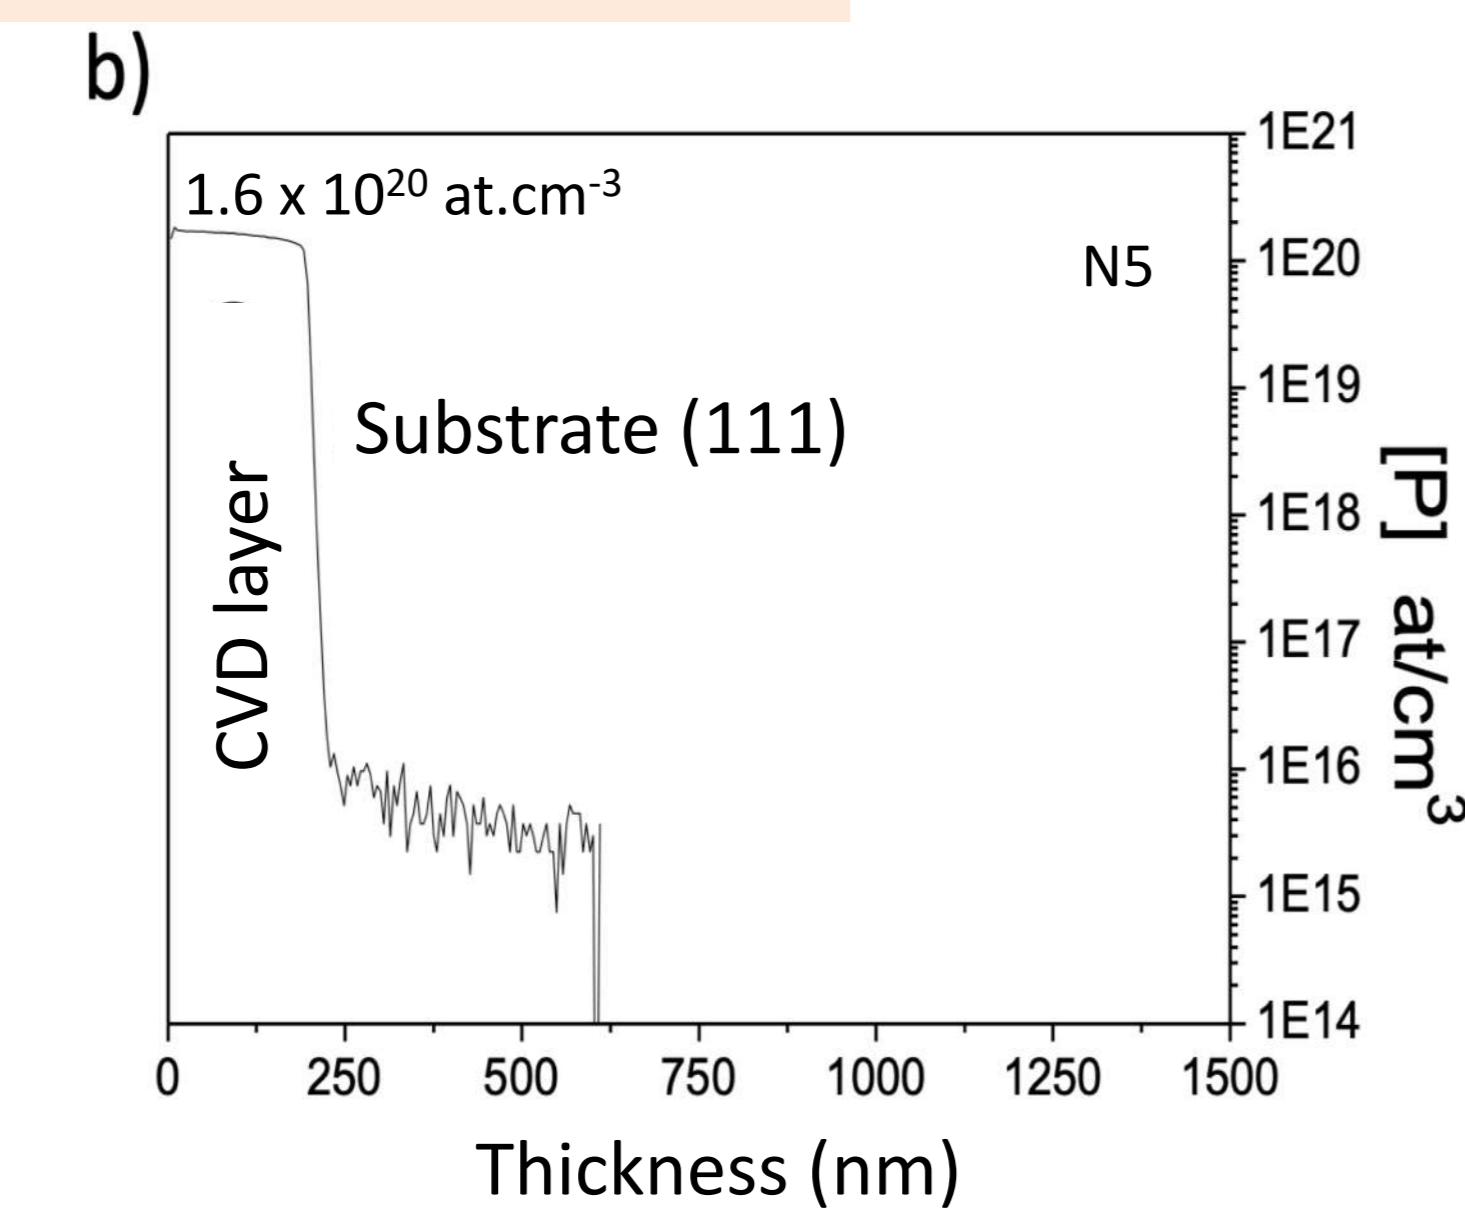

b) heavily phosphorous-doped layer by CVD (N₅ sample)

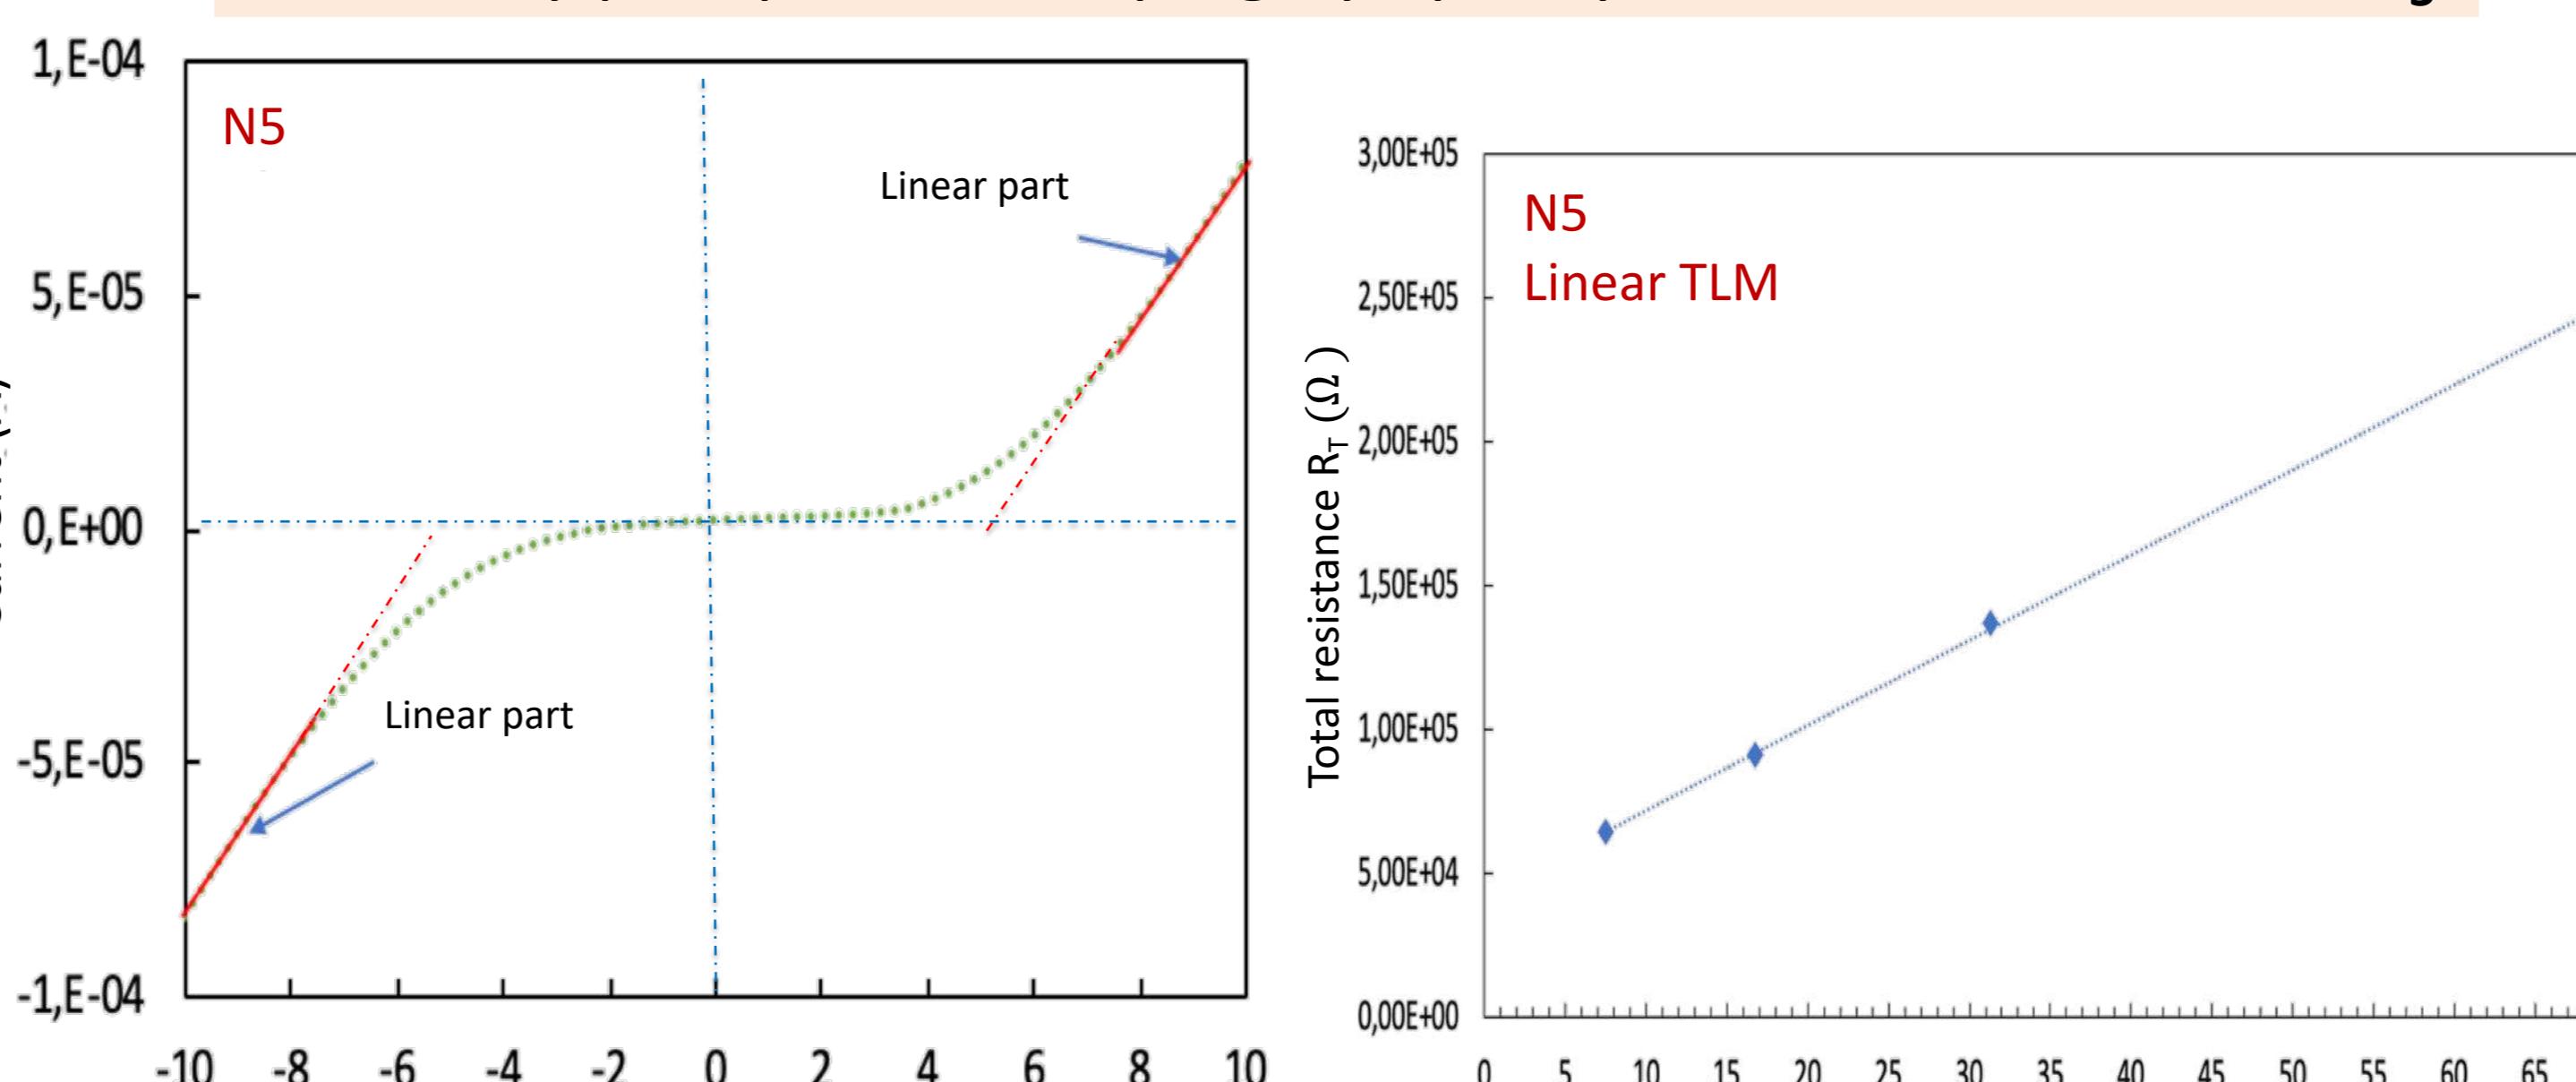

➤ Difficulty to achieve ohmic contacts on heavily phosphorous-doped epitaxial layers