



## **Extraordinary enhancement of Second harmonic generation in cavity-resonator integrated grating couplers**

Evgeny Popov, Anne-Laure Fehrembach, Elizabeth Hemsley, François Renaud, Antoine Monmayrant, Olivier Gauthier-Lafaye, Stéphane Calvez

### **► To cite this version:**

Evgeny Popov, Anne-Laure Fehrembach, Elizabeth Hemsley, François Renaud, Antoine Monmayrant, et al.. Extraordinary enhancement of Second harmonic generation in cavity-resonator integrated grating couplers. 2024 24th International Conference on Transparent Optical Networks (ICTON), Jul 2024, Bari, Italy. pp.1-3, <10.1109/ICTON62926.2024.10648002>. <hal-04751278>

**HAL Id: hal-04751278**

**<https://laas.hal.science/hal-04751278v1>**

Submitted on 24 Oct 2024

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



HAL Authorization

# Extraordinary enhancement of Second Harmonic Generation in cavity-resonator integrated grating couplers

Evgeny Popov<sup>1</sup>, Anne-Laure Fehrembach<sup>1</sup>, Elizabeth Hemsley<sup>1,2</sup>, François Renaud<sup>1,2</sup>, Antoine Monmayrant<sup>2</sup>, Olivier Gauthier-Lafaye<sup>2</sup>, Stéphane Calvez<sup>2</sup>

<sup>1</sup> Aix Marseille Univ, CNRS, Centrale Marseille, Institut Fresnel, 13013 Marseille, France

<sup>2</sup> LAAS-CNRS Laboratoire d'analyse et d'architecture des systèmes, 31031 Toulouse, France

*e-mail: e.popov@fresnel.fr*

## ABSTRACT

Cavity resonator integrated grating filters (CRIGF) [1] are composed with a sub-wavelength coupling grating of a few tens of periods (GC), surrounded with two distributed Bragg reflectors (DBR), etched on a multilayer stack of lossless dielectric materials (see Fig. 1). Illuminated with an incident beam overlying the GC, CRIGF exhibit resonances characterised by a strong electromagnetic field concentrated in the guiding layer beneath the structuration. We are currently exploiting this property to enhance second order nonlinear optical effects, in particular second harmonic generation (SHG) [2]. The main applications targeted in the long term are efficient and compact optical sources in wavelength ranges where technological solutions are rare. For this exploratory work, we are interested in the conversion from 1.55 $\mu$ m to 775nm.

**Keywords:** resonant waveguide gratings, second-harmonic generation.

## 1. INTRODUCTION

Cavity resonator integrated grating filters (CRIGF) [1] are composed with a sub-wavelength coupling grating of a few tens of periods (GC), surrounded with two distributed Bragg reflectors (DBR), etched on a multilayer stack of lossless dielectric materials (see Fig. 1). Illuminated with an incident beam overlying the GC, CRIGF exhibit resonances characterised by a strong electromagnetic field concentrated in the guiding layer beneath the structuration. We are currently exploiting this property to enhance second order nonlinear optical effects, in particular second harmonic generation (SHG) [2]. The main applications targeted in the long term are efficient and compact optical sources in wavelength ranges where technological solutions are rare. For this exploratory work, we are interested in the conversion from 1.55 $\mu$ m to 775nm.

## 2. FIELD ENHANCEMENT AND SECOND-HARMONIC GENERATION SIGNAL

Figure 1 give a schematic view of the structure. It consists of a dielectric waveguide made of lithium niobate divided in three grating structures: central GC part and 2 DBR mirrors, separated by 2 PS plane regions.

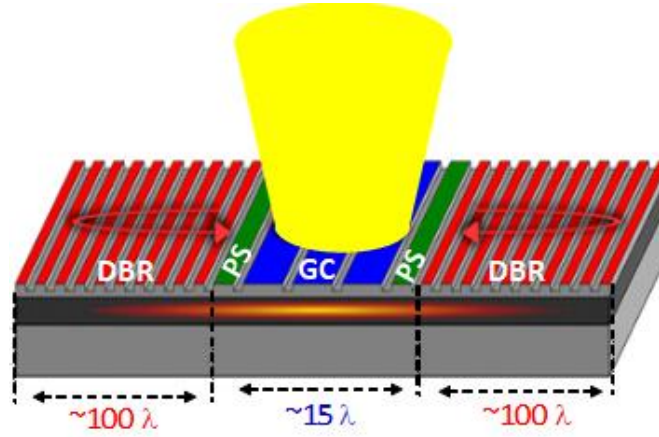


Figure 1. CRIGF device

Numerical modelling is carried out at the Fresnel Institute (Marseille), using in-house codes, in the undepleted-pump approximation [3]. The fabrication and optical characterisation are carried out at LAAS-CNRS (Toulouse). In our first work [2], we reached numerically and experimentally a conversion efficiency of the order of  $8 \times 10^{-6} \text{ W}^{-1}$ . This conversion efficiency is one order of magnitude higher than those achievable with infinite resonant gratings [4], but two orders of magnitude lower than those of the much longer ribbon guide components [5].

**Copyright 979-8-3503-7732-3/24/\$31.00 ©2024 IEEE**

However, the structure was not optimised to exalt SHG, and the full potential of CRIGF remains to be exploited, particularly in two ways. The first way is to also excite a mode at the signal frequency, in phase with the mode at the pump frequency. This could be achieved by taking advantage of the anisotropy of LiNbO<sub>3</sub>, or by introducing additional layers into the stack.

The second way, which we are currently exploring, consists in increasing the quality factor  $Q$  (ratio of the resonance wavelength to its spectral width) of the resonance at the pump, and thus its field inside the component. The resonances in a CRIGF are Fabry-Perot resonances of guided modes, which leak through the GC region. The quality factor of the resonance can thus be increased by decreasing this leakage. One possible application is a quasi-dark mode [6] of the GC region. In a symmetric DBR box, it is possible to displace the central grating by choosing different PS lengths, so that a symmetric DBR mode becomes a quasi-antisymmetric GC mode, Fig.2.


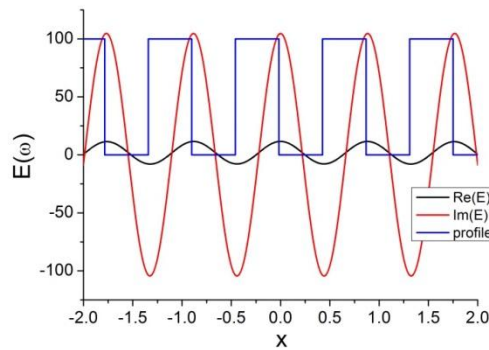


Figure 2. Spatial electromagnetic field distribution. Asymmetric structure No. 2 in close vicinity of the system center. The blue line represents the GC profile, shifted with respect to  $x = 0$ .

The result is that it is possible to enhance the electric field density by a factor of 1000, when compared with the bright mode excitation, Fig.3, which gives a formal increase of 106 of the SHG signal. It is necessary to stress

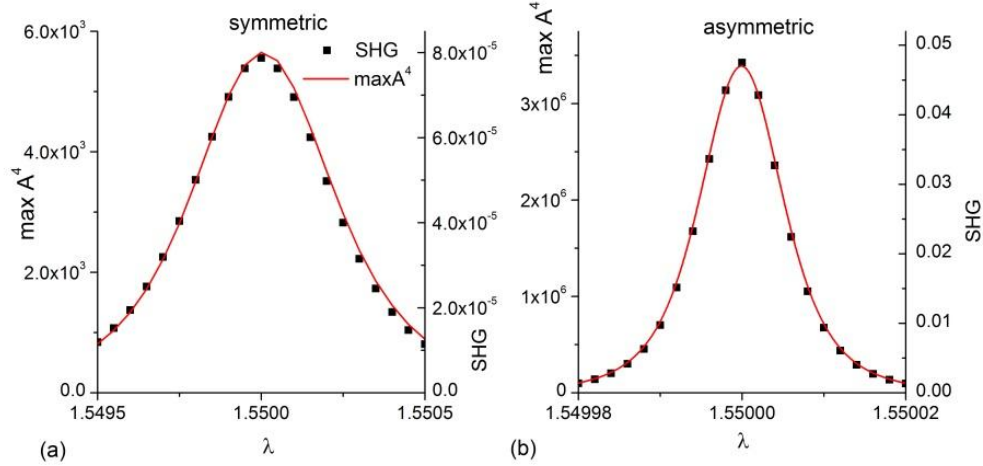

that this increase is only valid within the non-depleted pump approximation.

Figure 3. Spectral dependence with respect to the pump wavelength of the mode amplitude and the SHG of the a) asymmetric and b) symmetric structure

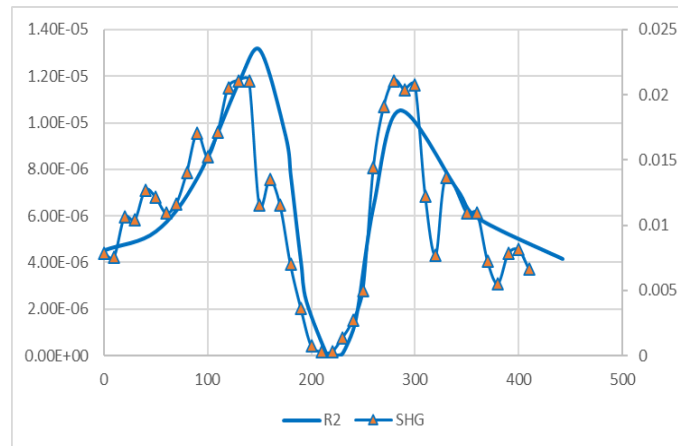


Figure 4. SHG as a function of the asymmetry of the GC position with respect to the DBR box (the relative difference nm between the lengths of the two PS regions in Fig.2). Triangles, experimental values on the left scale, full curve, the numerical results

Figure 4 gives a comparison between the theoretical and experimental data of the SHG signal as a function of the asymmetry of the structure. The latter is maximum at  $220$  nm and zero at  $0$  and  $440$  nm.

Although the conversion efficiencies predicted numerically are not reached, these components are nevertheless very promising.

## ACKNOWLEDGEMENTS

This work was supported by the AID (ANR-ASTRID RESON project). Acknowledgements (if any) should appear as a separate non-numbered section just before the list of references.

## REFERENCES

- [1] K. Kintaka et al., "Cavity-resonator-integrated grating input/output coupler for high-efficiency vertical coupling with a small aperture", *Opt. Lett.* **35**, pp. 1989-1991, 2010.
- [2] F. Renaud et al., "Second-harmonic-generation enhancement in cavity resonator integrated grating filters", *Opt. Lett.* **44**, pp. 5198-5201, 2019.
- [3] P. Chaumet et al., "Electromagnetic modeling of large subwavelength-patterned highly resonant structures", *Opt. Lett.* **41**, pp 2358-2361, 2016.
- [4] M. Siltanen et al., "Strong enhancement of second-harmonic generation in all-dielectric resonant waveguide grating", *Appl. Phys. Lett.* **91**, 111109, 2007.
- [5] C. Wang et al., "Second harmonic generation in nano-structured thin film lithium niobate waveguides", *Opt. Expr.* **25**, 6963-6973, 2017.
- [6] Fehrembach et al. "Dark mode-in-the-box for enhanced second-harmonic generation in corrugated waveguides", *Opt. Expr.* **29** (25), pp 40981, 2021.
- [7] Fehrembach et al., "Cavity-resonator integrated bi-atom grating coupler for enhanced second-harmonic generation", submitted to *Opt. Expr.*
- [8] A. Yariv, "Universal relations for coupling of optical power between microresonators and dielectric waveguides", *Electron. Lett.* **36** (4), pp321-322, 2000.
- [9] Popov et al., « Extreme enhancement of the quality (Q)-factor and mode field intensity in cavity-resonator gratings", *Opt. Expr.* **30** (14), pp25390, 2022.